


**THE CLOCK TOWER POINTE OF HARWOOD HEIGHTS,
HARWOOD HEIGHTS, ILLINOIS**

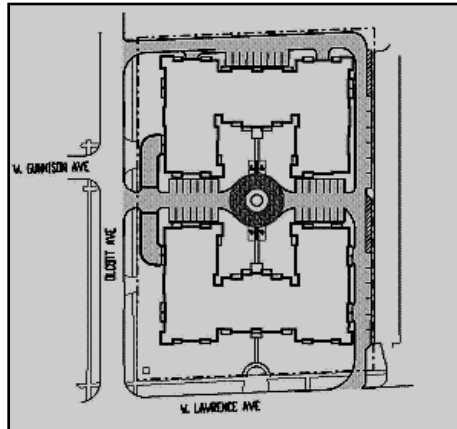

Engineering and Surveying Services were provided for the demolition of an existing manufacturing building and the development of two new 90-unit residential condominium buildings on a 3.4 acre site. Site improvements included an underground storm water management facility, sanitary sewer, extension, watermain connecting two existing Village owned watermains, on-site storm sewers, access road, detailed site grading, and soil erosion and sedimentation control measures. Coordination with the Village of Harwood Heights, Metropolitan Water Reclamation District, Illinois Environmental Protection Agency, Illinois Department of Transportation and other agencies for the necessary permits was also included.

Client: Zitella Development Corporation

Services Provided:

- Performed topographic survey and prepared topographic mapping including existing utilities
- Prepared Preliminary and Final Site Engineering Plans and the appropriate construction documents
- Provided drainage and stormwater management calculations and design including preparation of required permit applications
- Provided coordination and preparation of permit applications for IHPA, IDNR, IEPA, IDOT, MWRD and the Village of Harwood Heights

This project reflects Firm
and Staff experience.